


H F6770

# POLYFIN Blitzschutzhalter

**Product  
description and  
intended use**

The Polyfin® lightning protection bracket is used to fasten lightning protection wires that are routed on roofs with Polyfin® waterproofing. The holder consists of 2 parts. The holder itself, as well as a Polyfin sheet sleeve, which is put over the holder and welded to the Polyfin® waterproofing with the 3 lugs.

<b>Material:</b>	
Bracket:	Nylon
Membrane collar as punched part:	Polyfin or Polyfin Duo
<b>Colour:</b>	
Bracket:	grey
Membrane collar as punched part:	Polyfin: light grey; Polyfin Duo: white
<b>Measurements:</b>	
Bracket:	Total height approx. 5.3 cm; Diam. foot: Approx. 11 cm for lightning conductor wires with a diameter of 8 mm
Membrane collar as punched part:	Ext. diameter: Approx. 22 cm; hole diam.: approx. 2.5 cm

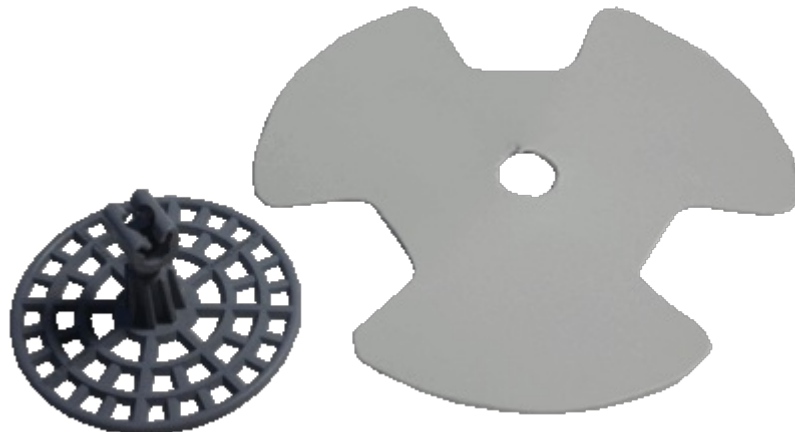

The declared data are indices based on the statistical quality control and refer to the date of production. Consider state of the art, standards, legal provisions and guidelines for the suitability of the mentioned field of application and application method. All specifications are without obligation. The user must assess the suitability of the product for the particular purpose and ensure the user's access to the current version of the product data sheet.

**Subject to alteration without notice.**

Storage conditions: The products have to be stored in original packaging, being protected from direct sun light, UV-beams and extreme conditions like heat, frost, moisture, etc. During cold season store the products in a frost-free area (+5°C) for 12 hours before application.

**Development, Production and Sales of our products according to ISO 9001.**